




## P462

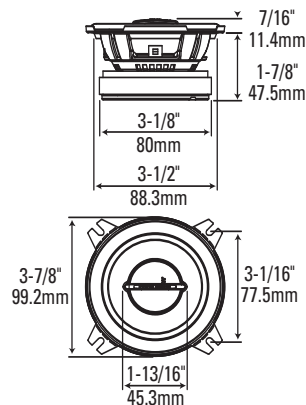


## P662

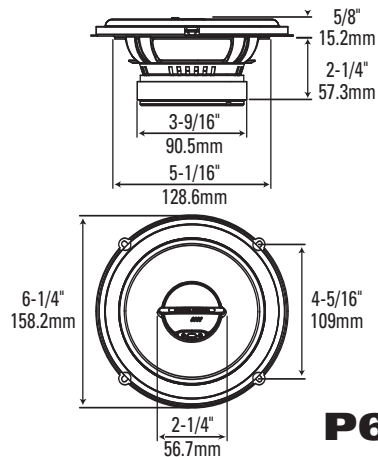


## P6562

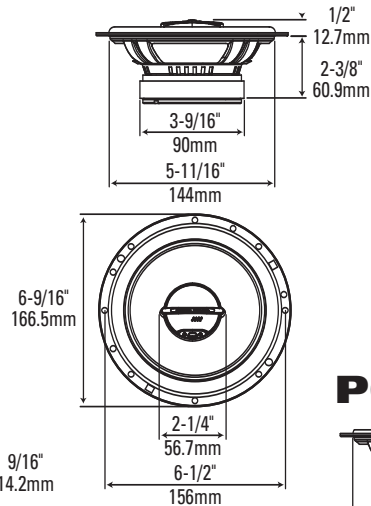


## P562

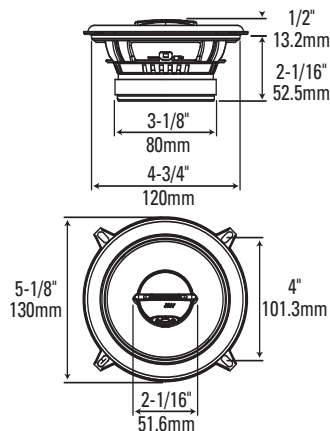

## P662S

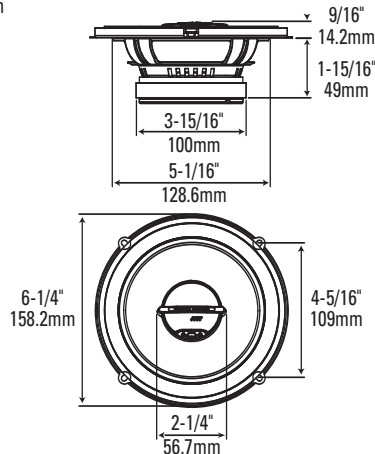

## P6562S

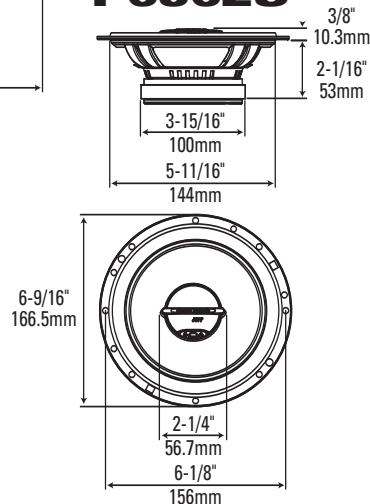

	P462	P562	P662	P662S	P6562	P6562S	P963	P6462	P8662
BL (T-m)	2.76	3.04	3.51	3.66	3.43	3.73	5.41	3.00	3.47
DCR (ohms)	2.28	2.38	2.38	2.30	2.34	2.48	2.44	2.19	2.40
Mms (g)	4.86	8.16	11.79	10.73	12.49	11.95	21.83	5.78	15.27
Sd (sq cm)	56.8	100.3	132.7	132.7	141.0	141.0	237.5	56.8	158.1
Cms (µm/N)	300	332	301	330	282	302	422	367	238
Vas (l)	1.36	4.69	7.45	8.17	7.87	8.43	33.43	1.66	8.35
Fs (Hz)	131.8	96.7	84.5	84.6	84.8	83.8	52.4	109.3	83.5
Qes	1.20	1.28	1.21	0.98	1.32	1.12	0.60	0.97	1.60
Qms	8.21	8.12	10.58	7.86	9.47	9.12	9.70	6.46	5.95
Qt	1.05	1.10	1.09	0.87	1.16	1.00	0.56	0.84	1.26
1wSPL (dB)	86.0	87.1	87.6	89.0	87.5	88.4	91.0	85.4	86.8

SPECIFICATIONS	P462	P562	P662	P662S	P6562	P6562S	P963	P6462	P8662
Type:	4" 2-Way	5-1/4" 2-Way	6-1/2" 2-Way	6-1/2" 2-Way Shallow	165mm 2-Way	165mm 2-Way Shallow	6" x 9" 2-Way	4" x 6" 2-Way	5" x 7"/6" x 8" 2-Way
Nominal Impedance:	2 Ohms	2 Ohms	2 Ohms	2 Ohms	2 Ohms	2 Ohms	2 Ohms	2 Ohms	2 Ohms
Power Handling, RMS:	50W	55W	75W	55W	75W	55W	110W	50W	75W
Power Handling, Peak:	150W	165W	225W	165W	225W	165W	330W	150W	225W
Frequency Response:	75Hz – 23kHz	55Hz – 23kHz	45Hz – 23kHz	55Hz – 23kHz	45Hz – 23kHz	55Hz – 23kHz	35Hz – 23kHz	75Hz – 23kHz	40Hz – 23kHz
Sensitivity (2.83V, 1m):	91dB	92dB	93dB	93dB	93dB	93dB	96dB	91dB	92dB

**GENERAL CARE:** The loudspeaker grilles may be cleaned with a damp cloth. Do not use any cleaners or solvents on the grilles or the speaker cones.

**WARRANTY:** Power Series speakers are warranted against defects. The duration of the speaker’s warranty depends on the laws in the country in which it was purchased. Your local JBL car audio retailer can help you determine the length of your warranty. To register your product, please visit us at [www.jbl.com](http://www.jbl.com).